



PCT

1. The first step in the process of creating a new product is to identify a market need. This involves conducting market research to understand what customers want and what problems they are facing.

2. Once a market need is identified, the next step is to develop a concept. This involves brainstorming ideas and creating a rough sketch of the product.

3. The third step is to create a prototype. This is a physical model of the product that can be used to test the concept and gather feedback from potential customers.

4. After the prototype is created, the next step is to conduct a feasibility study. This involves evaluating the technical, financial, and market viability of the product.

5. If the feasibility study is positive, the next step is to develop a business plan. This document outlines the company's goals, strategies, and financial projections.

6. The final step in the process is to launch the product. This involves marketing the product, distributing it, and providing customer support.

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GO, GW, ML, MR, NE, SN, TD, TG).

(25) Filing Language: English

(26) **Publication Language:** English

(30) Priority Data:
2004-005858 13 January 2004 (13.01.2004) JP

(71) Applicant (for all designated States except US): TOYOTA JIDOSHA KABUSHIKI KAISHA [JP/JP]; 1, Toyota-cho, Toyota-chi, Aichi-ken 471-8571 (JP).

(72) Inventor; and

(75) **Inventor/Applicant (for US only):** MIURA, Shimppei [JP/JP]; c/o Toyota Jidosha Kabushiki Kaisha, 1, Toyota-cho, Toyota-shi, Aichi-ken 471-8571 (JP).


Published:

- *without international search report and to be republished upon receipt of that report*

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: FUEL CELL SYSTEM AND FUEL GAS CONTROL METHOD

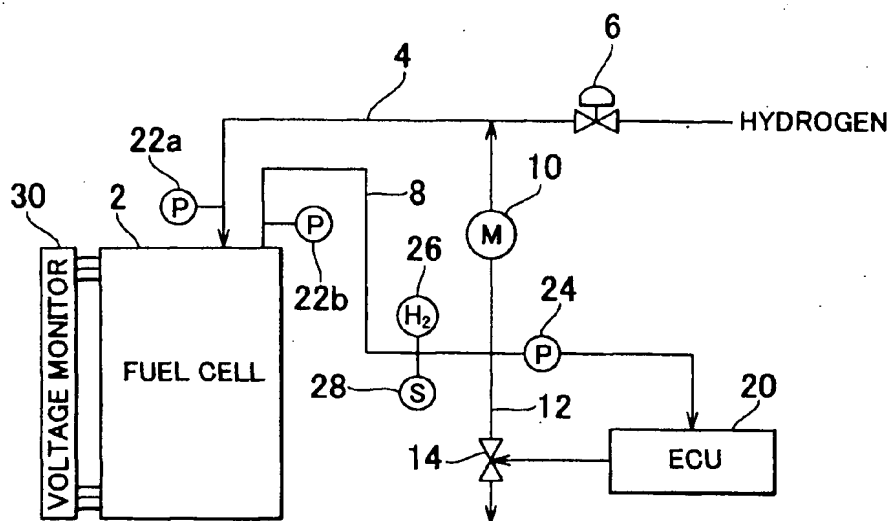

(S7) Abstract: A nitrogen concentration of fuel gas is estimated, and an amount of discharged fuel off-gas that is discharged from a fuel off-gas passage (8) to outside by a discharging mechanism (14) is controlled depending on the estimated nitrogen concentration. The nitrogen concentration, for example, can be estimated from a rate of pressure drop in the fuel off-gas passage (8) during the discharge of fuel off-gas.

WO 2005/069417 A2